

A large version of the Rosco logo, where the letter "o" is a stylized globe with horizontal lines in yellow, orange, red, purple, and blue. The rest of the letters "R", "S", "C", and "O" are in a bold, blue, sans-serif font.

**Новые решения Rosco для теле- и кино- производства**



# Rosco

---

*Расходные материалы*

# Rosco Filters



# Rosco Lens Cleaner



# Digital Compositing Products


## TV Paints

- Chroma Key, Ultimatte Green, DigiComp, DigiComp HD



# Digital Compositing Products

- ChromaKey Tape
- ChromaKey Floor (PVC)
- ChromaKey Cloth or Molton

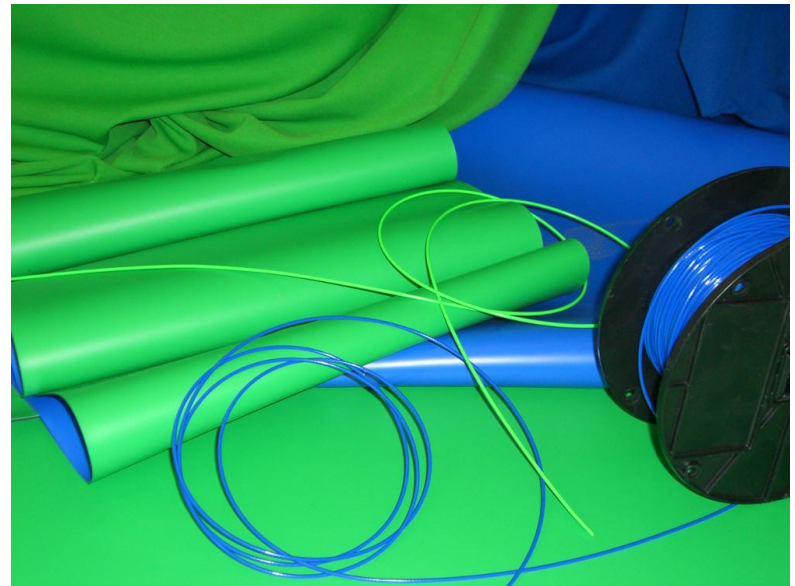

# Rosco Textiles





## Семейство Silk

*Разнообразие вариантов*



# Silk Family

## Silk 110



40cm x 39cm  
4.2Kg

## Silk 205



56cm x 24cm  
4.5Kg

## Silk 210



52cm x 34cm  
5.9Kg

## Silk 305



80cm x 24cm  
7.5Kg

# Silk 220




Width	Height	Depth	Weight
508.2 mm	649.9 mm	99.6 mm	7.5kg

Distance	@3200K	@5600K
	Lux	Lux
1m	5907	6645
2m	1521	1715
3m	689	774
4m	414	446






# Silk

- During the development of **Silk**™ Rosco focussed on colour quality and the soft, even, distribution of light.
- Colour quality is excellent with broad spectrum and very good metrics including R9.

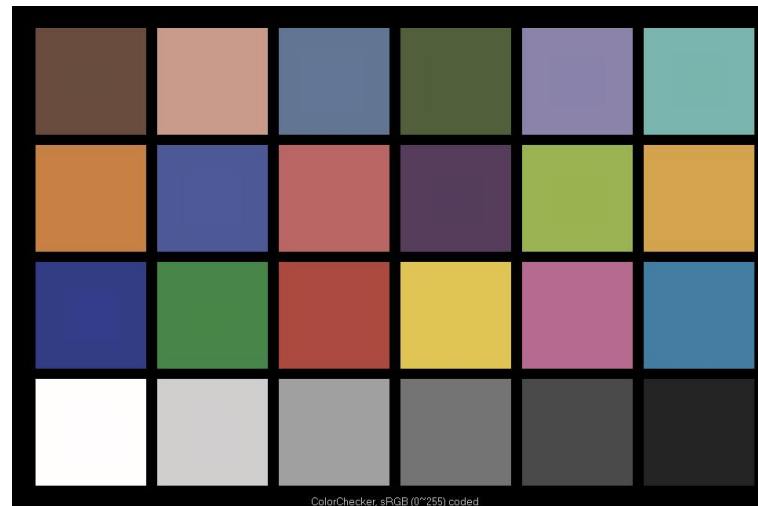

# Silk

Colour quality is excellent with broad spectrum and very good metrics including R9.

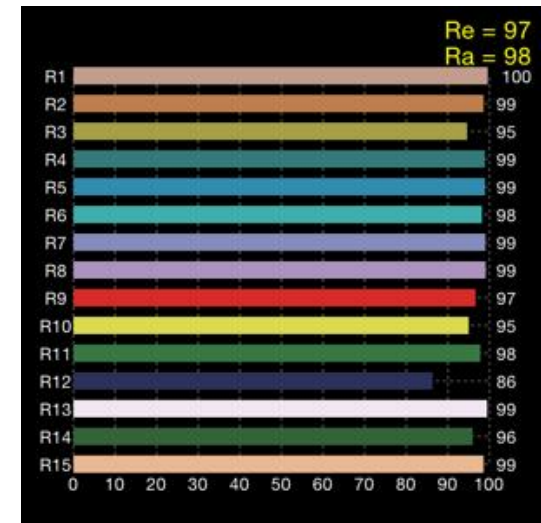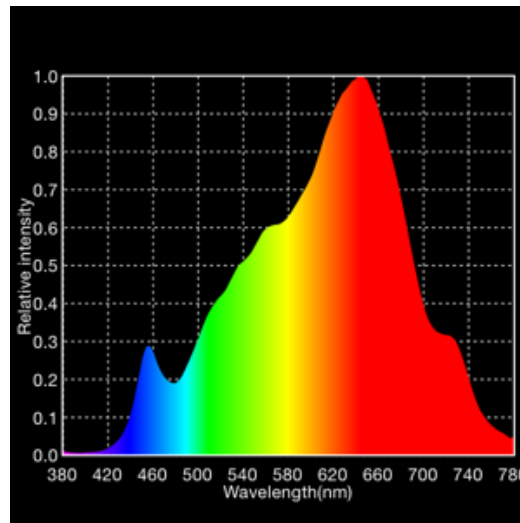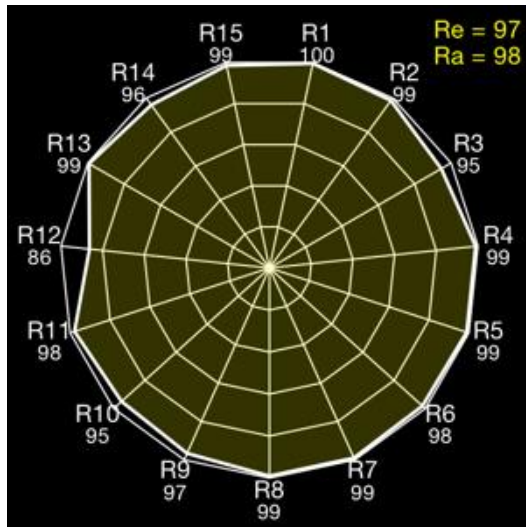

# Silk

Colour quality is excellent with broad spectrum and very good metrics including R9.

TLCI	97
CRI Ra	98
R9	98
CQS	96

The spectrum ensures skin tones will render extremely well.

# Silk

## Silk™ Data/Features

- Colour Temp Range: 2800K to 6500K
- High-volume light output — 2400 lux @ 1m @ 5600K
- TOP Scores in TLCI, CRI, CQS, R9
- DMX & Local Control
- Aluminium Housing

# Silk





# Silk Kit

- Silk 210
- PSU + Power Cable
- 60°Egg Crate Louver
- Soft Case
- V-Mount Battery Cheeseplate
- Anton Bauer Battery Cheeseplate
- Pole Operated yoke



# Silk Soft Case



# Silk

Egg Crate Louver 60° & 45°



Barn Doors

# Silk

Silk Softbox



Rain Cover

# LED Tape

---

*Светодиодные ленты*

# RoscoLED Tape

- Single Color White 3000K + 5600K
- RGBW
- Tuneable White 3000K – 6500K



# RoscoLED Tape Kits

RoscoLED Tape Kits are fully customizable, engineered LED solutions designed to allow filmmakers and broadcast set designers to add attractive accent lighting into their sets.

Each Rosco LED Tape Kit comes with multiple reels of high-quality, high-output, 24VDC LED Tape that are pre-configured with multi-pin connectors for easy installation – no soldering necessary!

- RoscoLED Tape Static White Kit (3000K or 5600K)
- RoscoLED Tape VariWhite Kit (3000K - 6000K)
- RoscoLED Tape VariColor Kit (RGB+W)





# Rosco View

---

*Поляризационные окна*



# RoscoVIEW + RoscoShades



Properly exposed exterior






Properly exposed interior



Properly exposed interior using RoscoVIEW to balance



Properly exposed interior using RoscoVIEW to darken



# RoscoVIEW + RoscoShades



# Soft Drop

---

*Интерактивный фон*

# SoftDrop™

## All-Natural Fabric Scenic Backdrop for Film Production



# SoftDrop™

## All-Natural Fabric Scenic Backdrop for Film Production



# SoftDrop™

40 ft.High x 175 ft.Wide – Front-lit, Back-lit




# SoftDrop™

## Ultra-Matte Finish Woven Natural Cotton





# SoftDrop™

## Easy to Design With

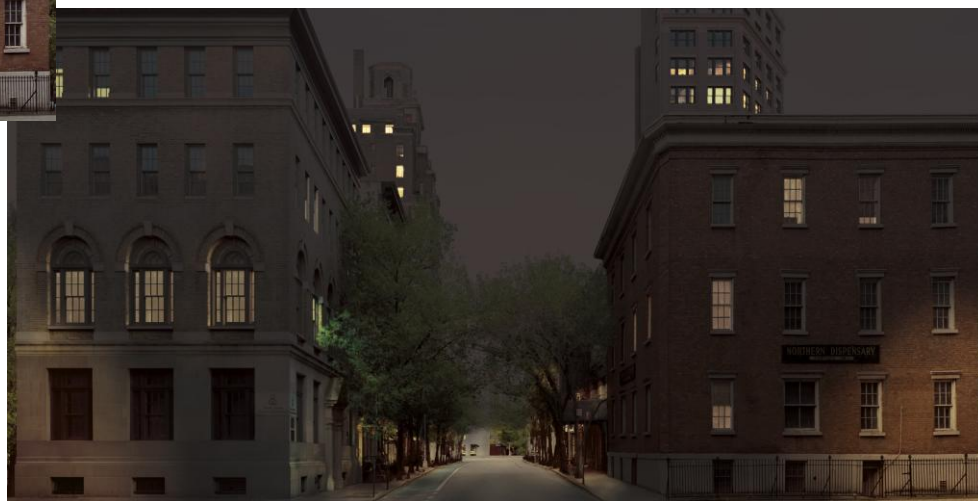




# SoftDrop™ Easy to Hang

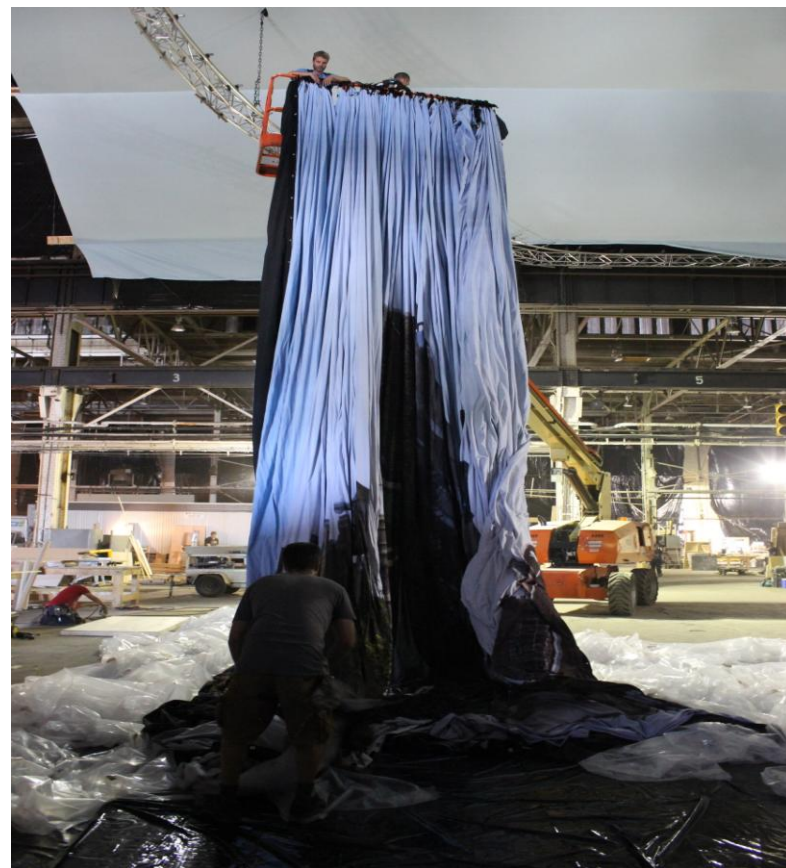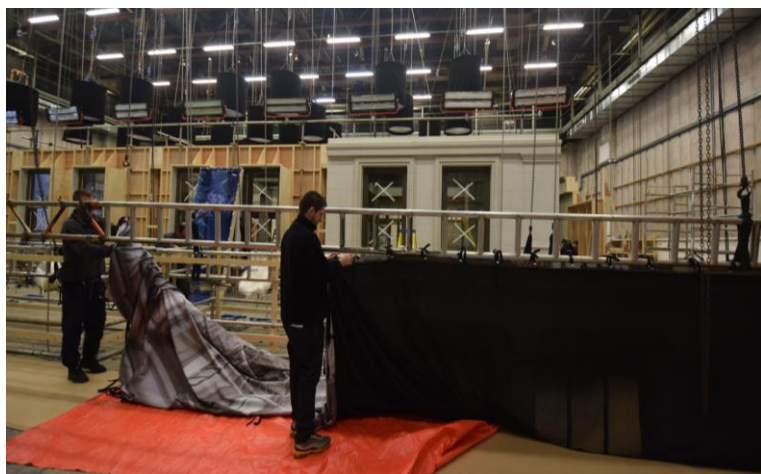

# SoftDrop™

## Easy to Light

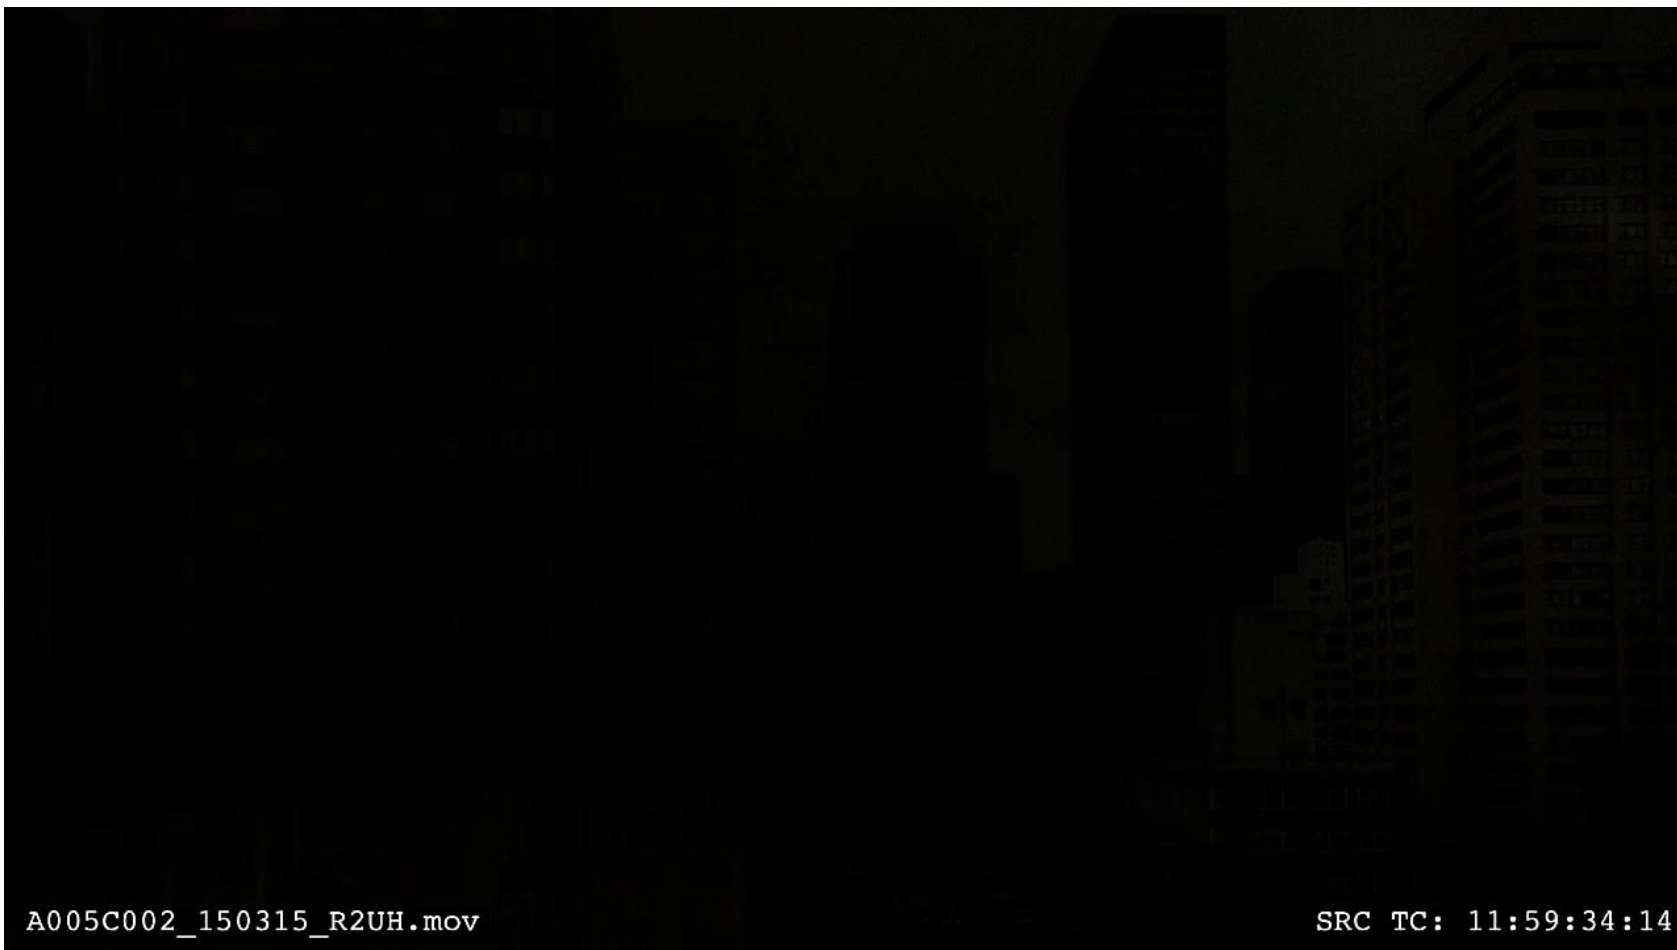

A005C002\_150315\_R2UH.mov

SRC TC: 11:59:34:14

# SoftDrop™ Easy to Ship





## DMG LED панели

*Новая линейка LED панелей в составе  
Rosco*

DMG  
LUMIÈRE  
LIGHTING TECHNOLOGIES



# MAXI SWITCH



Width	Height	Depth	Weight
1254 mm	754 mm	23 mm	12.5kg

Distance	@3200K	@5600K
	Lux	Lux
3m	17300	18800
5m	654	700
7m	370	399



# Image Spot™

*Идеальное изображение*






## Image Spot – основные характеристики

- Четкое, чистое изображение на расстоянии до 12 м

- 3000 lumens

- Для Интерьера (IP40) и улицы (IP65)
- Компактный, легкий:
  - 198mm x 121mm x 81mm
  - 2.5 kg
- Многообразии вариантов крепления

Superior Uniformity Across Entire Field

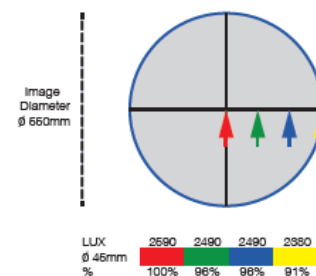



## Image Spot – Основные характеристики

- Варианты оптики:
  - 19° (узкий)
  - 25° (средний)
  - 30° (широкий)

Photometric Data for Narrow Beam Lens

### Illuminance at a Distance

	Center Beam LUX	Beam Width
1.0M	7,217.8 LUX	0.3 M 0.3 M
2.0M	1,804.4 LUX	0.7 M 0.7 M
3.0M	802.0 LUX	1.0 M 1.0 M
4.0M	451.1 LUX	1.3 M 1.4 M
5.0M	288.7 LUX	1.7 M 1.7 M
6.0M	200.6 LUX	2.0 M 2.0 M

Vertical Spread: 19.1° 
  Horizontal Spread: 19.2°

Photometric Data for Medium Beam Lens

### Illuminance at a Distance

	Center Beam LUX	Beam Width
1.0M	4,476.4 LUX	0.4 M 0.4 M
2.0M	1,119.1 LUX	0.8 M 0.8 M
3.0M	497.4 LUX	1.2 M 1.2 M
4.0M	279.8 LUX	1.6 M 1.6 M
5.0M	179.1 LUX	2.0 M 2.0 M
6.0M	124.3 LUX	2.4 M 2.4 M

Vertical Spread: 22.8° 
  Horizontal Spread: 22.8°

Photometric Data for Wide Beam Lens

### Illuminance at a Distance

	Center Beam LUX	Beam Width
1.0M	3,144.9 LUX	0.4 M 0.4 M
2.0M	786.2 LUX	0.8 M 0.8 M
3.0M	349.4 LUX	1.2 M 1.2 M
4.0M	196.6 LUX	1.7 M 1.6 M
5.0M	125.8 LUX	2.1 M 2.1 M
6.0M	87.4 LUX	2.6 M 2.6 M

Vertical Spread: 28.4° 
  Horizontal Spread: 28.2°





## Image Spot – Важные особенности

- Пассивное охлаждение/ Алюминиевый корпус
  - бесшумный
  - Гарантия на светодиод L70 = 70,000 часов
  
- Встроенный диммер (DMX 512)
  - IP40: Externally Accessible Dimming Pot
  - IP65: Dimming Pot under Top Cover
  
- 3 варианта цвета корпуса
  - Черный
  - Белый
  - Металлик



**Спасибо за внимание!**

**ROSCO**

**[www.rosco.com](http://www.rosco.com)**